

BOTO

BOTO



BETTER OF TOMORROW

PRODUCT CATALOGUE
TRUCK&BUS TYRES

SHANDONG WANDA BOTO TYRE CO., LTD

WWW.BOTOTYRE.COM

ADDRESS:NO.77 TONGXING ROAD, KENLI
DISTRICT, DONGYING CITY, SHANDONG
PROVINCE, CHINA 257506

E-mail:info@bototyre.com



SHANDONG WANDA BOTO TYRE CO., LTD



BOTO

BETTER OF TOMORROW

CONTENT

03-04 CHINA WANDA GROUP

05-06 BOTO TYRE FACTORY

07-08 PRODUCT MATCH

09-10 TYRE LOCATION

11-47 PRODUCT SPECIFICATION

SHANDONG WANDA BOTO TYRE CO., LTD

WWW.BOTOTYRE.COM

ADDRESS:NO.77 TONGXING ROAD, KENLI
DISTRICT, DONGYING CITY, SHANDONG
PROVINCE, CHINA 257506
E-mail:info@bototyre.com







Gathering scientific and technological talents
Building up Wanda foundation evergreen

During the past 30 years development, Wanda Group makes vigorous efforts to become renowned through the three-step-development of "Soaring by Science and Technology, Creating Advantage by Brand Building and Developing by Cooperation", develops to become a large scale enterprise group with its business covering port logistics, petrochemicals, tires, finance and trade, etc.



Six Development Advantages

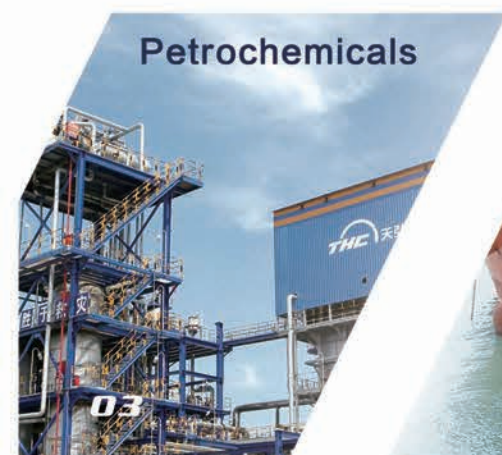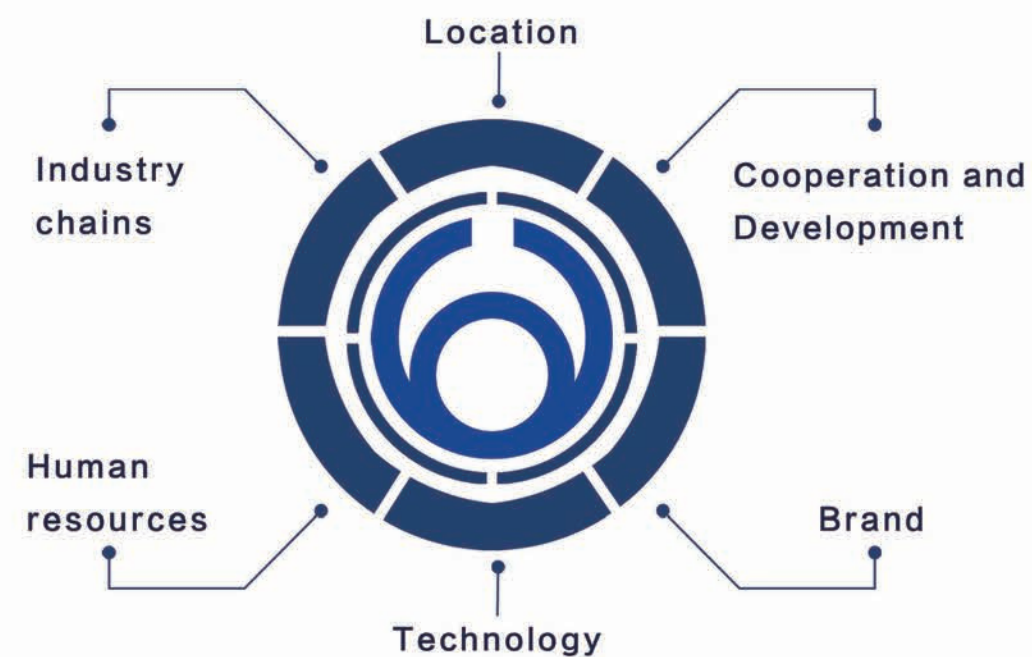

Shandong Wanda BOTO Tyre Co.Ltd

With annual production capacity of 15 million unit of PCR, 3.0million unit of TBR, and 100,000 unit of OTR, BOTO ranks among the World Top 75 Tire Manufacturers and China Top 10 Tire Manufacturers.

Products are exported to more than 168 countries and regions over the world, BOTO has been ranked China Top 500 Private Enterprises for five consecutive years.



October 2017, blockbuster landing before CCTV-1 News;
January 2018, exclusively sponsored Premier League Night;
January 2018, landed on CCTV Discovery Quality program;
September 2018, landed USA's Times Square;
June 2019, opened the official Tik Tok ID;
August 2019, landed before CCTV-4 China News;
September 2019, sponsored the National Day tribute film
My Motherland and Me

TUBE TYPE	90 SERIES	85 SERIES	80 SERIES	75 SERIES	70 SERIES	65 SERIES	60 SERIES	55 SERIES	50 SERIES
6.50R16LT	ST225/90R16	ST235/85R16	ST235/80R16	215/75R17.5	225/70R19.5	385/65R22.5	295/60R22.5	385/55R22.5	435/50R19.5
7.00R16LT	9.5R17.5		275/80R22.5	235/75R17.5	245/70R19.5	425/65R22.5	315/60R22.5		
7.50R16LT	10R22.5		295/80R22.5	295/75R22.5	255/70R22.5				
8.25R16LT	11R22.5		315/80R22.5	285/75R24.5	265/70R19.5				
8.25R20	12R22.5				275/70R22.5				
9.00R20	13R22.5				315/70R22.5				
10.00R200	11R24.5								
11.00R20									
12.00R20									
12.00R24									
325/95R24									

All position Page11-23	BT168,BT168A,BT168N,BT215 ,BT216, BT389,BT518,BT568,BT666,BT688,	BT217,BT288,BT316,BT336,BT357,BT360,BT368,BT369,BT369N,BT370, BT926,BT979,WT360,BT929,HA02,HC02
Steer,trailer Page24-29	BT212,BT212N,BT215,BT215N,BT218, WT211,HC02	BT219,BT268,BT511,BT667,BT669,BT688,BT929,BT968,BT968N,
Drive Page29-44	BT118,BT119,BT122,BT128,BT150,BT151, BT556,BT566,BT577,BT588,BT599,BT712,	BT156,BT157,BT159,BT188,BT388,BT388N,BT398+,BT398N,BT533, BT718,BT957,BT989,BT999,WT126,WT398+,WT712,FD33,FD35,HD02
Trailer Page45-47	BT215,BT267,BT668 BT667,BT669	

Vehicle type	Road conditions		High way	Paved road	On/Off-Highway	Unpaved Road Off-road
	Position					
Truck series 	All position	BT370	BT316 BT360 BT666 BT368 BT369 BT369N BT568 BT389 BT688 HA02 HC02	BT168 BT168A BT168N BT360 WT360 BT518	BT979	
	Steer,trailer	BT212 BT212N	BT215 BT215N BT218 BT219 BT511 BT688 BT968 BT968N WT211 HC02			
	Drive	BT388 BT388N BT588 BT599	BT398+ BT398N BT533 BT556 BT566 WT398+ BT577 HD02 FD33 FD35	BT118 BT119 BT151 BT156 BT157 BT159 BT188 BT712 WT126 WT712 BT150	BT122 BT128 BT989 BT999	
	Trailer	BT215 BT667 BT669	BT215 BT267 BT668			
Light truck series 	All position		BT216 BT217 BT288 BT926 BT929	BT168 BT360		
	Drive		BT957	BT718		
Bus series 	All position		BT215 BT336			
ST series 	Trailer		BT215 BT268			

BT168

Regional & Medium



All position



On/Off-Highway



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	12
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	12
8.25R20	16PR	236	974	139/137	2430/2300	930/930	K	6.5	13.5
9.00R20	16PR	259	1019	144/142	2800/2650	900/900	K	7.0	15.5
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	16.5
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	K	8.0	17
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	K	8.5	15
12.00R20	22PR	315	1125	158/155	4250/3875	970/970	J	8.5	15
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	16
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	17.5
13R22.5	18PR	320	1124	156/150	4000/3350	875/875	L	9.75	15
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	M	9.00	15
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	17

BT168A

Regional & Medium



All position



On/Off-Highway



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	15

BT168N

Regional & Medium



All position



On/Off-Highway



CHARACTERISTICS

★ Cost-effective

★ Low fault rate


SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	16
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	16
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	16

BT215

Regional & Medium



All position



City Road



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
275/70R22.5	16PR	276	958	148/145	3150/2900	900/900	M	8.25	19.2
275/70R22.5	18PR	276	958	148/145	3150/2900	900/900	J	8.25	19.2

BT217

Regional & Medium



All position



Paved road



Highway



CHARACTERISTICS

- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.00R16LT	14PR	200	775	118/114	1320/1180	770/770	L	5.50F	10

BT216

Regional & Medium



All position



Paved road



Highway



CHARACTERISTICS

- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	12

BT288

Regional & Medium



All position



Paved road



Highway



CHARACTERISTICS

- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	K	6.00G	11
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	12

BT316

Regional & Medium



All position



Paved road

CHARACTERISTICS

- ★ Low fault rate
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	17

BT368

Regional & Medium



All position



Paved road

CHARACTERISTICS

- ★ Low fault rate
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	K	8.0	15.5

BT360

Regional & Medium



All position



On/Off-Highway

CHARACTERISTICS

- ★ Low fault rate
- ★ Cost-effective
- ★ Anti-stone retention



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
6.50R16LT	12PR	185	750	110/105	1060/925	670/670	L	5.50F	12
7.00R16LT	14PR	200	775	118/114	1320/1180	770/770	L	5.50F	14
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15.5

BT369

Medium and long haul



All position



Paved road



Highway

CHARACTERISTICS

- ★ Low fault rate
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	18
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	18

BT369N Medium and long haul



All position



Paved road



Highway

CHARACTERISTICS

- ★ Low fault rate
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	17.5

BT389 Medium and long haul



All position



Snow and ice road

CHARACTERISTICS

- ★ Excellent wet grip performance
- ★ Strong traction
- ★ Excellent heat dispersion performance



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	825/825	L	8.25	21
11R24.5	16PR	279	1104	149/146	3250/3000	825/825	L	8.25	21

BT370 Medium and long haul



All position



Paved road



Highway

CHARACTERISTICS

- ★ Low fault rate
- ★ Cost-effective
- ★ Fuel-economy



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	14.5

BT518 Medium and long haul



All position



On/Off-Highway

CHARACTERISTICS

- ★ Low fault rate
- ★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	17

BT568

Regional & Medium



All position



Paved road

CHARACTERISTICS

★ Low fault rate

★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	16.5
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	15

BT666

Regional & Medium



All position



City Road

CHARACTERISTICS

★ Cost-effective

★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	17.5

BT926

Medium and long haul



All position



Paved road



Highway

CHARACTERISTICS

★ Low fault rate

★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
215/75R17.5	16PR	212	767	135/133	2180/2060	850/850	J	6.00	13
225/70R19.5	14PR	226	811	128/126	1800/1700	760/760	M	6.75	13.5
235/75R17.5	18PR	233	797	143/141	2725/2575	875/875	J	6.75	13.5
245/70R19.5	16PR	248	839	136/134	2240/2120	825/825	M	7.50	13.5
9.5R17.5	18PR	240	842	143/141	2725/2575	875/875	M	6.75	12.5

BT929

Medium and long haul



All position



Paved road



Highway

CHARACTERISTICS

★ Low fault rate

★ Cost-effective



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10R22.5	16PR	254	1019	144/142	2800/2650	900/900	L	7.50	14.5
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	13.5

WT360

Regional & Medium



All position



On/Off-Highway

CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Anti-stone retention
- ★ Cost-effective
- ★ Fuel-economy



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
215/75R17.5	18PR	212	767	135/133	2180/2060	850/850	J	6.00	15
295/80R22.5	18PR	298	1044	152/149	3750/3250	900/900	M	9.00	17.5
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900	K	9.00	17.5

HA02

Medium and long haul



All position



Paved road



Highway

CHARACTERISTICS

- ★ Low noise design
- ★ Superior handling performance
- ★ Longer lifespan
- ★ Fuel-economy



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
235/75R17.5	18PR	233	797	143/141	2725/2575	875/875	J	6.75	14
245/70R19.5	18PR	248	839	141/140	2575/2500	850/850	J	7.50	14.5
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	14.5
275/80R22.5	18PR	276	1012	149/146	3250/3000	900/900	L	8.25	16.5

HC02

Medium and long haul



All position



Paved road



Highway

CHARACTERISTICS

- ★ Superior handling performance
- ★ Fuel-economy
- ★ Low noise design
- ★ Longer lifespan



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
235/75R17.5	18PR	233	797	143/141	2725/2575	875/875	J	6.75	13
215/75R17.5	18PR	212	767	135/133	2180/2060	850/850	J	6.00	13.5
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	13.5
275/80R22.5	18PR	276	1012	149/146	3250/3000	900/900	L	8.25	16.5

BT336

Short haul



All position



City Road

CHARACTERISTICS

- ★ Superior handling performance
- ★ Anti-eccentric wear design
- ★ Longer lifespan
- ★ Sidewall protection



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
275/70R22.5	16PR	276	958	148/145	3150/2900	900/900	K	8.25	22.3

BT688

Medium and short haul



All position



Paved road



Highway



CHARACTERISTICS

- ★ Superior handling performance
- ★ Low noise design
- ★ Fuel-economy
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	16.5

BT979

Short haul



All position



Off-road



CHARACTERISTICS

- ★ Resistant to punctures
- ★ Stronger drive
- ★ Longer lifespan
- ★ Self-cleaning

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER	SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL			
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	F	9.00	23

BT219

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Anti-stone retention
- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER	SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL			
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	14.8
275/80R22.5	16PR	276	1012	149/146	3250/3000	850/850	L	8.25	15
295/60R22.5	16PR	292	926	149/146	3250/3000	900/900	L	9.00	14.8
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	14.8
315/60R22.5	16PR	313	950	152/148	3550/3150	900/900	L	9.75	14.8
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15.5

BT688

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER	SINGLE/DUAL	SINGLE/DUAL	SINGLE/DUAL			
275/70R22.5	16PR	276	958	148/145	3150/2900	900/900	M	8.25	14.8
315/70R22.5	18PR	312	1014	154/150	3750/3350	900/900	M	9.00	15

HC02

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

- ★ Superior controllability
- ★ Wear-resisting design
- ★ Comfortable driving experience
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/70R22.5	18PR	312	1014	151/148	3450/3150	830/830	L	9.00	15.5
11R22.5	18PR	279	1054	149/146	3250/3000	900/900	L	8.25	16.5
11R24.5	16PR	279	1104	149/146	3250/3000	825/825	L	8.25	16.5

BT212N

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Anti-stone retention
- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	14
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	14
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	14
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	14
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	14

BT215

Medium and long haul



Steer, Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Fuel-economy
- ★ Anti-stone retention
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/55R22.5	20PR	386	996	160	4500	900	K	12.25	15
425/65R22.5	20PR	430	1124	165	5150	825	K	12.25	15
435/50R19.5	20PR	438	931	160	4500	900	J	14.00	14

BT968

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	15
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	15

WT211

Regional & Medium



Steer, trailer



Paved road



CHARACTERISTICS

★ Anti-eccentric wear

★ Anti-wear

★ Fuel-economy

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	22PR	298	1044	154/149	3750/3250	850/850	L	9.00	16.5
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900	L	9.00	16.5

BT968N

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

★ Cost-effective

★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	15

BT268

Medium and short haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

★ Cost-effective

★ Fuel-efficient

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	16

BT511

Medium and long haul



Steer, trailer



Paved road



Highway



CHARACTERISTICS

- ★ Superior controllability
- ★ Comfortable driving experience
- ★ Wear-resisting design
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	18PR	279	1054	149/146	3250/3000	930/930	L	8.25	21.5

FD33

Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Excellent driving performance
- ★ superior high-speed performance
- ★ Anti-eccentric wear design
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	20

HD02

Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Excellent driving performance
- ★ Excellent wet grip performance
- ★ Anti-eccentric wear design
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/70R22.5	18PR	312	1014	151/148	3450/3150	830/830	L	9.00	20.5

FD35

Long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Excellent driving performance
- ★ superior high-speed performance
- ★ Anti-eccentric wear design
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	19.5

BT118

Regional



Drive



CHARACTERISTICS

- ★ Strong traction
- ★ High load capacity
- ★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	21
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	F	8.0	22
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	22

BT119

Regional



Drive



CHARACTERISTICS

- ★ Strong traction
- ★ High load capacity
- ★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	D	8.5	31

BT122

Regional



Drive



CHARACTERISTICS

- ★ Strong traction
- ★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	F	9.00	24

BT128

Regional



Drive



CHARACTERISTICS

- ★ High load capacity
- ★ Strong traction
- ★ Cut & chip resistance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	D	7.5	24
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	F	8.0	24
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	24

BT150

Regional & Medium



Drive



On/Off-Highway

CHARACTERISTICS

- ★ Cost-effective
- ★ Strong traction



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
275/70R22.5	18PR	276	958	148/145	3150/2900	900/900	J	8.25	20

BT156

Regional & Medium



Drive



On/Off-Highway

CHARACTERISTICS

- ★ High load capacity
- ★ Cost-effective
- ★ Strong traction



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	19
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	19.5

BT151

Regional & Medium



Drive



On/Off-Highway

CHARACTERISTICS

- ★ High load capacity
- ★ Strong traction



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11.00R20	18PR	293	1085	152/149	3550/3250	930/930	J	8.0	20
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	J	8.5	20.5

BT157

Regional & Medium



Drive



On/Off-Highway

CHARACTERISTICS

- ★ High load capacity
- ★ Cost-effective
- ★ Strong traction



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R24	20PR	315	1226	160/157	4500/4125	900/900	K	8.5	19
325/95R24	22PR	325	1228	162/160	4750/4500	850/850	K	9.0	19.5

BT159

Regional & Medium



Drive



On/Off-Highway

CHARACTERISTICS

- ★ Cost-effective
- ★ Strong traction



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	K	8.25	22

BT188

Regional & Medium



Drive



On/Off-Highway

CHARACTERISTICS

- ★ Cost-effective
- ★ Strong traction



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R20	20PR	315	1125	156/153	4000/3650	900/900	F	8.5	22
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	G	8.25	24.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	G	8.25	24.5
13R22.5	18PR	320	1124	156/150	4000/3350	875/875	K	9.75	22

BT388

Medium and long haul



Drive



Paved road



Highway

CHARACTERISTICS

- ★ Excellent heat dispersion performance
- ★ Strong traction
- ★ Excellent wet grip performance



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	M	8.25	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	20.5
315/70R22.5	18PR	312	1014	154/150	3750/3350	900/900	M	9.00	19
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	21

BT388N

Regional & Medium



Drive



Paved road



Highway

CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Cost-effective
- ★ Anti-stone retention
- ★ Fuel-economy
- ★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12R22.5	18PR	300	1085	152/149	3550/3250	930/930	L	9.00	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	21
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	21

BT398+ Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Anti-wear
- ★ Fuel-economy
- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	24

BT398N Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
10.00R20	18PR	278	1054	149/146	3250/3000	930/930	K	7.5	19.5

BT556 Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
255/70R22.5	16PR	255	930	140/137	2500/2300	800/800	M	7.50	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5

BT566 Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	22.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	22.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	22.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	22.5

BT577

Medium and long haul



Drive



CHARACTERISTICS

- ★ Excellent heat dispersion performance
- ★ Strong traction
- ★ Excellent wet grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	L	8.25	20.5
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	20.5
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	20.5
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	20.5

BT588

Medium and long haul



Drive



CHARACTERISTICS

- ★ Excellent heat dispersion performance
- ★ Strong traction
- ★ Excellent wet grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	20
295/80R22.5	18PR	298	1044	152/149	3550/3250	900/900	M	9.00	21
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	L	9.00	21

BT599

Medium and long haul



Drive



CHARACTERISTICS

- ★ Excellent heat dispersion performance
- ★ Strong traction
- ★ Excellent wet grip performance

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1050	148/145	3150/2900	850/850	L	8.25	23.5

BT712

Regional & Medium



Drive



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	20PR	312	1076	156/150	4000/3350	850/850	K	9.00	19

BT718

Regional & Medium



Drive



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
7.50R16LT	16PR	215	805	124/120	1600/1405	800/800	L	6.00G	13.5
8.25R16LT	16PR	235	855	128/124	1800/1600	770/770	K	6.50H	15

WT126

Regional



Drive



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Anti-wear
- ★ Cut & chip resistance
- ★ Cost-effective
- ★ Fuel-economy
- ★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900	D	9.00	22

BT957

Medium and long haul



Drive



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
215/75R17.5	16PR	212	767	135/133	2180/2060	850/850	J	6.00	14.5
225/70R19.5	14PR	226	811	128/126	1800/1700	760/760	L	6.75	15
235/75R17.5	18PR	233	797	143/141	2725/2575	875/875	J	6.75	15.4
245/70R19.5	16PR	248	839	136/134	2240/2120	825/825	M	7.50	16
265/70R19.5	18PR	262	867	143/141	2725/2575	850/850	J	7.50	15.5
9.5R17.5	18PR	240	842	143/141	2725/2575	875/875	K	6.75	15.5

WT398+

Medium and long haul



Drive



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Anti-wear
- ★ Fuel-economy
- ★ Cost-effective
- ★ Low fault rate



SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
295/80R22.5	22PR	298	1044	154/149	3750/3250	850/850	L	9.00	19
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900	L	9.00	20

BT533

Medium and long haul



Drive



Paved road



Highway



CHARACTERISTICS

- ★ Superior controllability
- ★ Wear-resisting design
- ★ Comfortable driving experience
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	18PR	279	1054	149/146	3250/3000	900/900	L	8.25	21.5
11R24.5	16PR	279	1104	149/146	3250/3000	825/825	L	8.25	21.5

BT999

Short haul



Drive



Off-road



CHARACTERISTICS

- ★ Resistant to punctures and corrosion
- ★ Stronger drive
- ★ High load capacity
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
13R22.5	22PR	320	1124	158/155	4250/3875	950/950	B	9.75	24.5
12.00R20	22PR	315	1125	158/155	4250/3875	970/970	B	8.5	25

BT989

Short haul



Drive



Off-road



CHARACTERISTICS

- ★ Resistant to punctures and corrosion
- ★ Stronger drive
- ★ High load capacity
- ★ Longer lifespan

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
12.00R20	22PR	315	1125	158/155	4250/3875	970/970	B	8.5	23.5

WT712

Regional & Medium



Drive



On/Off-Highway



CHARACTERISTICS

- ★ Anti-irregular wear
- ★ Cost-effective
- ★ Anti-stone retention
- ★ Fuel-economy
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
315/80R22.5	22PR	312	1076	158/156	4250/4000	900/900	K	9.00	19

BT215

Regional & Medium



Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
ST235/85R16	14PR	235	806	132/127	2000/1750	760/760	L	6.50	9.5
ST225/90R16	14PR/G	220	808	128/124	1800/1600	830/830	K	6.00	12
ST235/80R16	14PR/G	235	782	128/124	1800/1600	725/725	L	6.50	9.5

BT667

Medium and long haul



Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Fuel-economy
- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	10
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	10
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	10
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	10

BT267

Medium and long haul



Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Anti-eccentric wear
- ★ Fuel-economy
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX	MAX LOAD (kg)	PRESSURE (kpa)	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	17

BT668

Medium and long haul



Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Cost-effective
- ★ Low fault rate

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
385/65R22.5	20PR	389	1072	164	5000	900	K	11.75	15

BT669

Medium and long haul



Trailer



Paved road



Highway



CHARACTERISTICS

- ★ Fuel-economy
- ★ Low fault rate
- ★ Cost-effective

SIZE	PR	NEW TYRE INFLATED DIMENSIONS(mm)		LOAD INDEX SINGLE/DUAL	MAX LOAD (kg) SINGLE/DUAL	PRESSURE (kpa) SINGLE/DUAL	SPEED RATING	STANDARD RIM	TREAD DEPTH (mm)
		SECTION WIDTH	OVERALL DIAMETER						
11R22.5	16PR	279	1054	146/143	3000/2725	830/830	M	8.25	10
11R24.5	16PR	279	1104	149/146	3250/3000	830/830	L	8.25	10
285/75R24.5	16PR	283	1050	147/144	3075/2800	830/830	L	8.25	10
295/75R22.5	16PR	298	1014	146/143	3000/2725	830/830	L	9.00	10